


# SuperVac Updraft

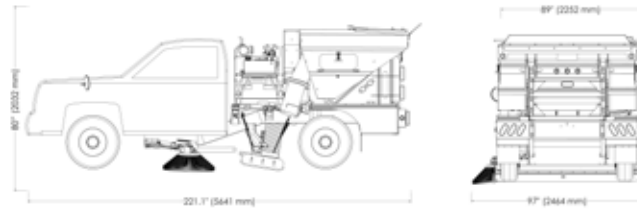

Sweeper shown with optional equipment. Design and specifications subject to change without notice. Specifications may vary depending on chassis

## General Specifications:

Total Empty Weight	6200 Lbs (2,812 Kgs)
Wheelbase	133" (3,378 Mm)
Sweeping Width	81" (2,057 Mm)
With One Broom Option	97" (2,464 Mm)
Turning Radius	274" (6,960 Mm)
Overall Length	221.1" (5,641 Mm)
Overall Height (Without Beacon)	80" (2,032 Mm)
Overall Width	89" (2,252 Mm)

## Auxiliary Engine:

Manufacturer	Kohler
Horse Power	31
Type	Water Cooled Gasoline
Warranty	3 Year

## Hopper:

Volumetric Capacity	2.0 Cubic Yards (1.53 M <sup>3</sup> )
Dumping	Hydraulic High Dump
Material	Stainless Steel
Dump Height	67" (1,702 Mm)
Dumping Tilt Angle	88°
Inspection Doors	1 On Left Side 1 On Right Side
Controls	Electric; In-Cab
Paint	Imron Elite®

## Fan System:

Type	Whisper Wheel Turbine
Drive	Belt Driven
Number Of Blades	10
Diameter	24" (610 Mm)
Construction	Welded Abrasion-Resistant Steel
Housing Liner	Bolt-In Corded Rubber
Mounting	Pillar Block Bearings
Vacuum Enhancer	For Heavy/Light Material

## Sweeping Head:

Type	Debris-Moving Blast And Suction
Material	Stainless Steel
Operating Direction	Forward And Reverse
Suspension	2 Trailing Arms; Spring Balanced
Length	81" (2,057 Mm)
Blast Hose Diameter	10" (254 Mm)
Suction Hose Diameter	10" (254 Mm)
Flap Design	3 Flaps
Controls	Hydraulic Raise And Lower
Skids	Tungsten Carbide

## Electrical System:

Battery	1 @ 12 Volt, 750 CCA Each
Controls	Electric; In-Cab
Circuit Protection	Resettable Circuit Breakers

## Water System:

Tank Capacity	25 Gallon (95 L)
Construction	Polyethylene
Pump	Electric 12-Volt DC
Controls	Electric; In-Cab
Filter	100 Mesh Screen
Mounting	Removable
Fill Diameter	3" (76.2 Mm)

## Gutter Broom(s):

Type	Poly Wafer
Wafers	2 - Disposable Poly
Diameter	36" (914 Mm)
Drive	Hydraulic Torque Motor
Speed	Variable
Mounting	Trailing Arm Design
Location	Left Hand Side
Suspension	Free Floating
Wear Adjustment	Automatic
Impact Protection	Spring
Tilt Angle Adjustment	Manual; At Broom

## Hydraulic System:

Type	Belt Driven Gear Pump
Fluid Capacity	3 Gal (11.4 L)
Purpose	Power Gutter Broom
Dump System Hydraulics	12 Volt Power Unit

## Optional Equipment:

Consult The Factory For Available Options.



The People You Know. The Products You Trust.

# SuperVac Updraft™



\*Sweeper shown with optional equipment

- Twin Engine
- Stainless Steel Welded Construction
- Half Ton Fuel Efficient V6 Chassis
- Low Profile Sweeper
- GVW Tested
- Improved Pickup Power
- Increased Screen Area
- 40 Years of Schwarze Quality
- Next Day Replacement Parts
- American Made

The People You Know. The Products You Trust.

Affiliates:



Schwarze Industries, Inc.  
1055 Jordan Road  
Huntsville, AL 35811  
800.879.7933  
An Alamo-Group Company



Quality



Performance



Public Safety



Value



Customer Support

800.879.7933

www.schwarze.com



# SuperVac Updraft™

Powerful Low Profile Parking Area Sweeper

Financing Available

**Lower Noise Level:**  
Reduce operator stress and increased ability to operate in noise sensitive areas

**2.0 Cubic Yard Hopper:**  
Maximum capacity without exceeding chassis GVW requirements

**67" Dump Height:**  
Can dump into a standard container

**Welded Stainless Steel Hopper Assembly:**  
No leaks, No rust

**Optional 36" diameter Poly Gutter Broom:**  
Lower cost of ownership than segmented brushes



 **AMERICAN BUILT-AMERICAN MADE**

**31 HP Kohler Liquid Cooled Auxiliary Engine:**  
Smooth, quiet, compact design & backed by 3 year warranty



**Whisper Wheel™ Fan System:**  
70% quieter, uses 20% less fuel & 7% more powerful than an open face fan



**Stainless Steel Fan Housing**

**No Butt Connectors!**  
Eliminates shorts caused by poor connections

**Hardox Steel:**  
Eliminates the need for a fan coating, and creates a longer life expectancy

**Bolt In Suction Tube & Transition Tube:**  
For easy maintenance

**Optional Locking Tool Box**



**Drivers Side Pickup:**  
All sweeping functionality on operator's side for improved safety and performance capabilities

**1/2 Ton Chassis:**  
Low profile design to fit in parking garages



**Leaf Bleeder:**  
Allows exhaust up to 80% of the air and the ability to better adjust the airflow

**Hydraulic Test Ports:**  
Reduces troubleshooting time with use of quick-disconnect gauge ports

**Backup Alarm:**  
Backup alarm automatically adjusts above surrounding noise levels

**Dual Side Storage Areas:**  
Keeps necessary tools and equipment handy



**Sweeps-in-Reverse™:**  
Safely back-up or operate in reverse without damaging the sweeping head

**Choice of Fuel Efficient V6 Chassis Engines:**

**Chevrolet Silverado Chassis**  
Switches to four-cylinders mode under light engine loads to help save fuel



**The Ford F-150 Chassis**  
With fuel-saving Eco-Boost technology.



**LED Lighting:**  
Better visibility on the streets



Also Available from Schwarze Industries, Inc:



\*Optional Equipment Shown



**Parts Availability:** Schwarze original equipment parts are available when you need them.



**Empowered and Responsive:** Schwarze People are valued for their commitment to our future.



**Schwarze Products:** Engineered for enhanced performance and low ownership cost.



**Warranty Support:** Schwarze people are on duty to support you and your equipment.

Schwarze parking lot sweepers are guaranteed to be free from defects due to faulty materials and / or workmanship for a period of 12 months, or 1200 hours. Liability is limited to replacement of defective parts at factory or authorized dealer. The standard warranties of the chassis and auxiliary engine manufacturer shall apply.

